


NAILSTRIP CLADDING AND ROOFING

DATA SHEET

A more simplistic install than Standing Seam and Snaplock, Nailstrip still manages to achieve a contemporary architectural look.

This makes this profile a popular choice with beginner installers and builders without needing advanced technical know-how. The Nailstrip cladding and roofing system is durable and can withstand extreme weather conditions.

Offering variable panel widths, two rib heights and easy installation, this clip-less design saves labour, time and money.

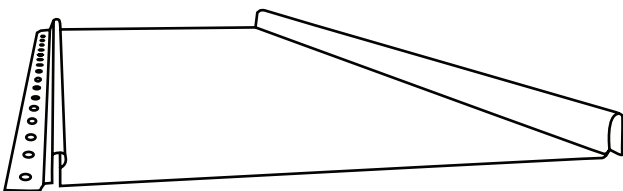

Profile Dimensions

Panel Widths	185mm – 485mm
Rib Height	25mm 38mm
Length	Up to 8 meters

Material Availability

KME Copper | VM Zinc
COR-TEN | Aluminium
COLORBOND®
COLORBOND® Ultra
ZINCALUME®
UniCote® | MagnaFlow®
UniCote® LUX

General Requirements & Install

- Continuous wall studs or Top hats at max 600mm spacing
- Plywood 17mm structural to AS 2269
- Fully breathable / waterproofed membrane
- Fix screw directly through concealed slotted holes in panel
- Panel Installed via nail or screw fixings. Each strip is snapped over the adjoining panel securing it in place and concealing the fixing.
- Installation is quick and simple with no need for seaming tools



ARCHITECTURAL
Roofing + Building Supplies

A: 1/13 De-Havilland Cres, Ballina NSW 2478

P: 02 6686 4884

E: sales@architecturalroofing.com.au

W: architecturalroofing.com.au