


STANDING SEAM CLADDING AND ROOFING

DATA SHEET

Offering a concealed fixing technology, Standing Seam can be applied to concave, curved, conical, flat and domed applications.

The possibilities are endless with the Standing Seam system. Offering a versatile profile and premium finish by incorporating panels that lap each other which are then sealed with a specialised tool. The panels can be roll-formed, custom folded, altered and changed to suit architectural styles as well as multiple shapes such as doors and windows.

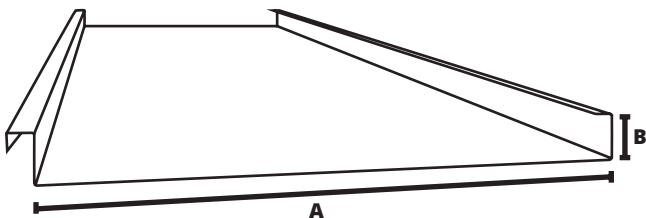

Profile Dimensions


Width - A	200mm - 450mm
Rib Height - B	25mm 38mm 50mm
Length	Up to 8.2 metres

Material Availability

KME Copper | VM Zinc | COR-TEN | Aluminium
COLORBOND® | COLORBOND® Ultra | ZINCALUME®
UniCote® | MagnaFlow® | UniCote® LUX

General Requirements

- Continuous wall studs or top hats at max 600mm spacing (walls only)
- Installation on 19mm structural plywood to AS 2269
- Each panel secured with concealed clips at 300mm centres
- Fully breathable, waterproofed membrane

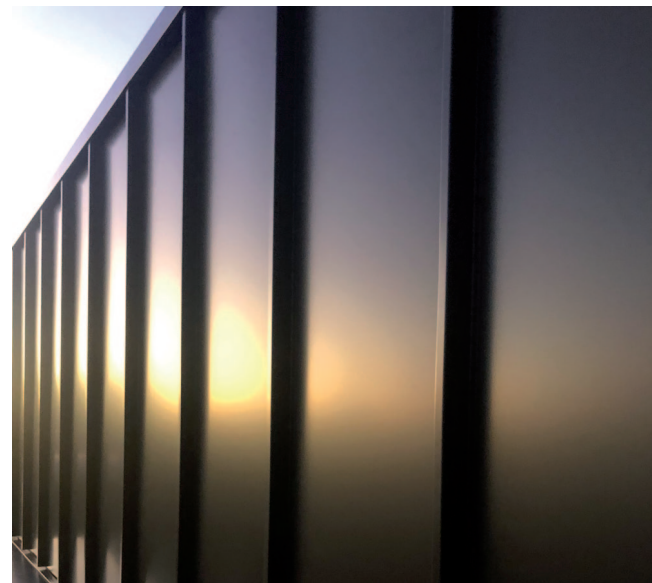

ARCHITECTURAL
Roofing + Building Supplies

A: 1/13 De-Havilland Cres, Ballina NSW 2478

P: 02 6686 4884

E: sales@architecturalroofing.com.au

W: architecturalroofing.com.au